



100w Solar Panel SP100



Welcome to our 100W solar panel.

This panel, like the rest of our SolarGo2 rigid panels, is built to last with a strong full frame aluminium structure, A-Grade solar cells, a tough low iron, high light transmission glass front and 5 metres of high-end 2.5mm² UV stable DC cable making sure you get the best transmission of power from your panel to your controller.

Designed to last in an outside environment for years to come whether it's on top of stables, a caravan, a motorhome or even a boat out at sea. We also give you a 20-year cell warranty* and a 10-year product warranty** as standard on our rigid solar panel range giving you real peace of mind with your SolarGo2 solar panel.

The 100W panel is ideal for small off grid projects from providing power for a stable lighting project, charging a battery up in a caravan or boat to running lights on building signage and keeping telematics systems working along the roadside.

The SolarGo2 100W panel is designed to be outside and work in all weather conditions, providing you with variable amounts of power throughout the year depending on the weather conditions and the time of year.

As an example, we would say it will give you an average of around 30.3Ah (600Wh) per day in the summer in the UK and 4Ah (80Wh) per day in the winter. This panel will require a charge controller if being connected to a 12v battery.

*The 20-year cell warranty is based on the cells producing over 80% of the original power in year 20.

**The 10-year product warranty is for any manufacturing defects. Any accidental damage etc is not covered.



Technical Specification

Electrical Characteristics

Type	Monocrystalline (A grade 158.75mm High efficiency)
Peak power (pmax)	100Wp
Power tolerance range(%)	±3%
Open Circuit voltage (VOC)	23.76v DC
Max. power voltage (VMP)	19.8v DC
Shot circuit current (ISC)	5.45A
Max power current (IMP)	5.05A
Max system voltage	1000v DC

Panel info

Part number	SP100
Power	100Wp
Cable type	2.5mm twin core red/black (UV stable)
Cable length	5M
Frame material	Aluminium
Face Material	High light transmission, low iron glass 3.2mm
Dimensions	780 x 680 x 35mm

Performance UK weather (weather dependant)

Average expected winter	4Ah (80Wh) per day (ie x 0.8)
Average expected summer	30.3Ah (600Wh) per day (ie x 6h)


Warranty

Performance of cells	20 years (at 80% of day 1 performance)
Product construction	10 Year



Above Specification at standard test conditions (STC): 1000W/m², Cell temperature 25°C, AM 1.5

Drawing

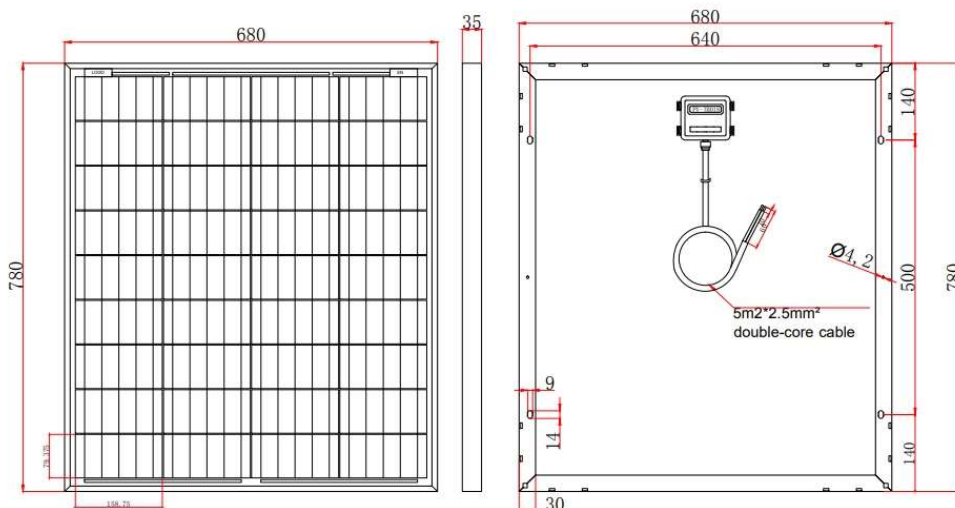

Unit A5,
Northway trading estate
Northway lane,
Tewkesbury,
Gloucestershire,
GL20 8JH
Tel +44 (0) 1684 607002
www.solargo2.com